



W44-2


**APU**[®]

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Stop bead with mesh

DECO-TEX-DUE

With cranked drip edge and 12.5 cm mesh

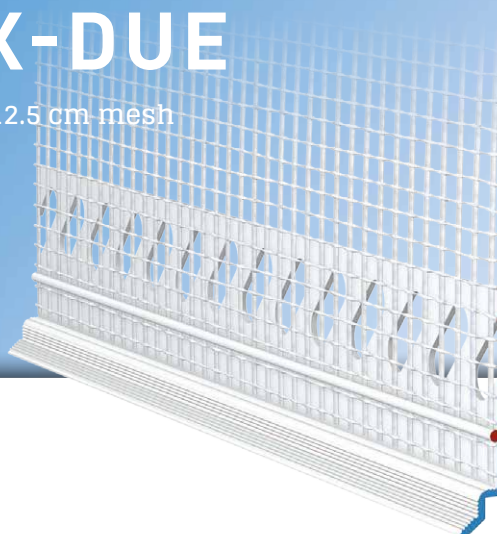

The **APU stop bead with mesh DECO-TEX-DUE** is used in compound heat insulation systems as a bottom plaster termination or as a horizontal plaster separation.

The profile has a punched plaster bar and a cranked drip edge. There is a fabric fillet welded onto the profile. Each bar has a fabric overhang on one side of 10 cm in the lengthways direction. The first raised edge serves for the application of the reinforcement base plaster. The final render is applied and skimmed on the second skimming edge. The profile ensures with its contour that water flows in a targeted way.

What is created after completion of the plastering work is a clean termination of the plaster.



W44-2



Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

DECO-TEX-DUE stop bead with mesh

W44-2	W44-2-2000	2.0 m	25 bars = 50 m	4.5 kg
-------	------------	-------	----------------	--------

With cranked drip edge and 12.5 cm mesh

Features


	DECO-TEX-DUE STOP BEAD WITH MESH
Material	<ul style="list-style-type: none"> ■ Rigid PVC manufactured under DIN-16941
Mesh	<ul style="list-style-type: none"> ■ Min. 160 g/m² approved for compound heat insulation systems ■ 12.5 cm wide – MW 4x4 mm ■ Ultrasonic welded

Important information


Storage	Always store profiles laid down in a dry place.
Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.

For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'

Details

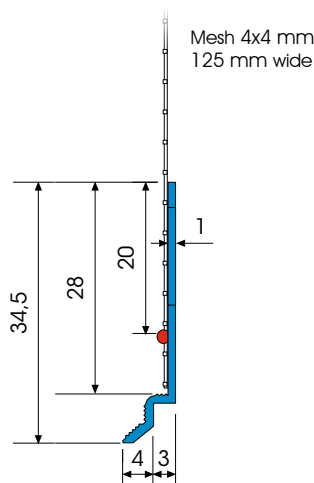

Sectional drawing in mm

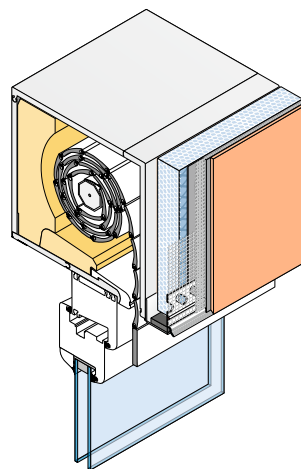

Application drawing